

13-2027128 - LEDFLEX IN FP 927 5M

13-2030128 - LEDFLEX IN FP 930 5M

13-2040128 - LEDFLEX IN FP 940 5M



1. Specifications


- Number Led/M : 128pcs
- Input voltage (DC) : 24V
- Power W/m±10% : 15W
- Width for finished product : 10mm
- CRI : >90
- Max length(10% voltage drop) : 5m
- Cut Size : 62.5mm

Standards / Normative Requirements

- Eye security : IEC 62471
- Protection class : EN 60529
- Safety Requirements : EN 62031 IEC 60598-1
- EMC / radio disturbance characteristics : EN 55015
- ROHS : Yes
- UL : Yes



2. Dimension

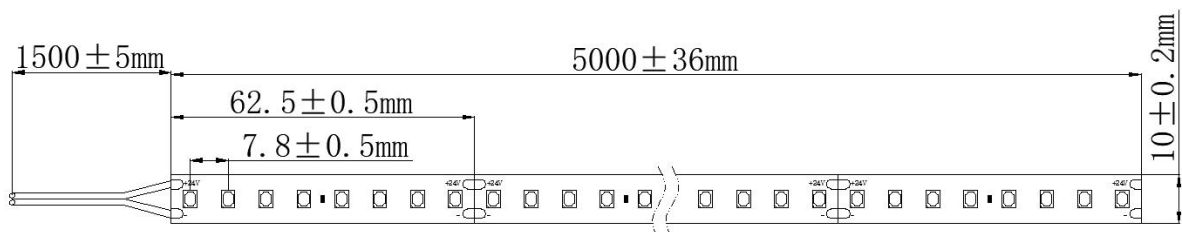

LEDsGO BVBA

Drieslaan 6 | B-8560 Wevelgem (Moorsele) | Tel +32 (0) 56 424 992 | Fax +32 (0) 56 435 707
 BTW BE 0824.326.685 | ING IBAN BE47 3630 7083 3480 | BIC BBRUBEBB

3. Product Parameters:

Part No	CCT(K)	CRI	R9	Pow(W/m)	LM/W	LM/M	VDC	IP
13-2027128	2700	>90	>50	15	116	1740	24	20
13-2030128	3000	>90	>50	15	121	1815	24	20
13-2040128	4000	>90	>50	15	124	1860	24	20

4. Packing

10 Silicone mounting brackets per reel(5m) included in the package.

5. Precautions

1. The given data has typical values, Due to tolerances of the production process and electrical components, electrical power can be $\pm 10\%$
2. Less than 14.4W/M(4.39W/feet)no need for additional heat sinking on Alu profile, if more than 14.4W/M(4.39W/feet) must be used the heat sinking.