

**13-2027140 - LEDFLEX IN 927 5M**

**13-2030140 - LEDFLEX IN 930 5M**

**13-2040140 - LEDFLEX IN 940 5M**




## 1. Specifications

- Number Led/M : 140pcs
- Input voltage (DC) : 24V
- Power W/m $\pm$ 10% : 5W
- Width for finished product : 8mm
- CRI : >90
- Max length(10% voltage drop) : 5m
- Cut Size : 50 mm

## Standards / Normative Requirements

- Eye security : IEC 62471
- Protection class : EN 60529
- Safety Requirements : EN 62031 IEC 60598-1
- EMC / radio disturbance characteristics : EN 55015
- ROHS : Yes
- UL : Yes

## 2. Dimension

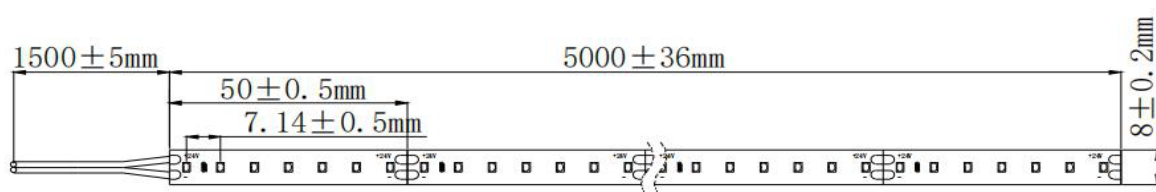

**LEDsGO BVBA**

Drieslaan 6 | B-8560 Wevelgem (Moorsele) | Tel +32 (0) 56 424 992 | Fax +32 (0) 56 435 707  
BTW BE 0824.326.685 | ING IBAN BE47 3630 7083 3480 | BIC BBRUBEBB

### 3. Product Parameters:

Part No	CCT(K)	CRI	R9	Pow(W/m)	LM/W	LM/M	VDC	IP
13-2027140	2700	>90	>50	5	107	535	24	20
13-2030140	3000	>90	>50	5	109	545	24	20
13-2040140	4000	>90	>50	5	111	555	24	20

### 4. Packing

10 Silicone mounting brackets per reel(5m) included in the package.

### 5. Precautions

1. The given data has typical values, Due to tolerances of the production process and electrical components, electrical power can be  $\pm 10\%$
2. Less than 14.4W/M(4.39W/feet)no need for additional heat sinking on Alu profile, if more than 14.4W/M(4.39W/feet) must be used the heat sinking.