

13-2027160 - LEDFLEX IN HP 927 5M

13-2030160 - LEDFLEX IN HP 930 5M

13-2040160 - LEDFLEX IN HP 940 5M




1. Specifications

- Number Led/M : 160pcs
- Input voltage (DC) : 24V
- Power W/m±10% : 20W
- Width for finished product : 10mm
- CRI : >90
- Max length(10% voltage drop) : 5m
- Cut Size : 50mm

Standards / Normative Requirements

- Eye security : IEC 62471
- Protection class : EN 60529
- Safety Requirements : EN 62031 IEC 60598-1
- EMC / radio disturbance characteristics : EN 55015
- ROHS : Yes
- UL : Yes

2. Dimension

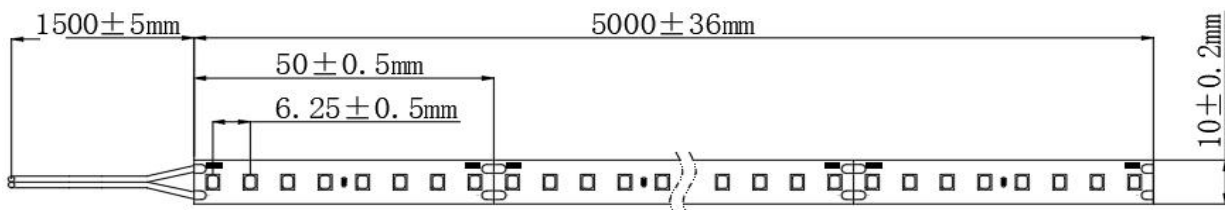

LEDsGO BVBA

Drieslaan 6 | B-8560 Wevelgem (Moorsele) | Tel +32 (0) 56 424 992 | Fax +32 (0) 56 435 707
 BTW BE 0824.326.685 | ING IBAN BE47 3630 7083 3480 | BIC BBRUBEBB

3. Product Parameters

Part No	CCT(K)	CRI	R9	Pow(W/m)	LM/W	LM/M	VDC	IP
13-2027160	2700	>90	>50	20	116	2320	24	20
13-2030160	3000	>90	>50	20	122	2440	24	20
13-2040160	4000	>90	>50	20	123	2460	24	20

4. Packing

10 Silicone mounting bracket per reel(5m) are included in the package.

5. Precautions

1. The given data has typical values, Due to tolerances of the production process and electrical components, electrical power can be $\pm 10\%$
2. Less than 14.4W/M(4.39W/feet)no need for additional heat sinking on Alu profile, if more than 14.4W/M(4.39W/feet) must be used the heat sinking.