


13-6527210 - LEDFLEX OUT MP 927 5M

13-6530210 - LEDFLEX OUT MP 930 5M

13-6540210 - LEDFLEX OUT MP 940 5M

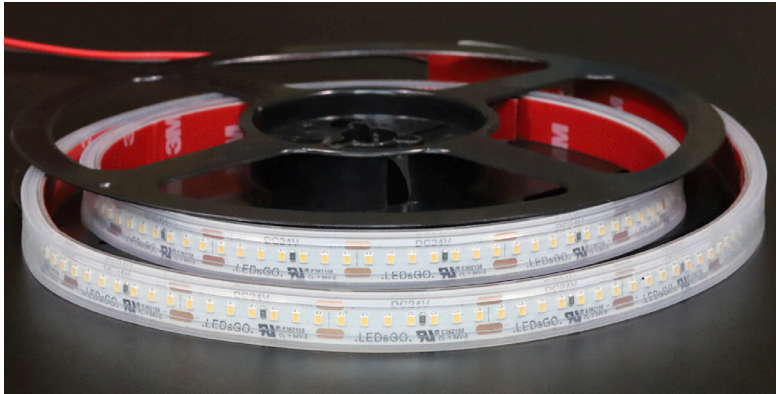


## 1. Specifications

- Number Led/M : 210pcs
- Input voltage (DC) : 24V
- Power W/m±10% : 10W
- Width for finished product : 12mm
- CRI : >90
- Max length(10% voltage drop) : 5m
- Cut Size : 33.3mm

## Standards / Normative Requirements

- Eye security : IEC 62471
- Protection class : EN 60529
- Safety Requirements : EN 62031 IEC 60598-1
- EMC / radio disturbance characteristics : EN 55015
- ROHS : Yes
- UL : Yes

## 2. Dimension

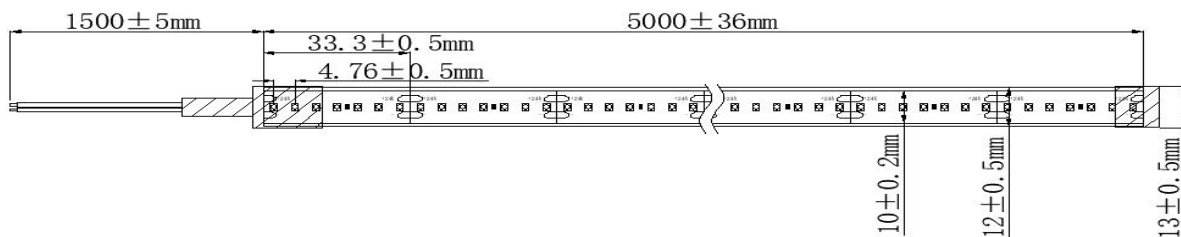

LEDsGO BVBA

Drieslaan 6 | B-8560 Wevelgem (Moorsele) | Tel +32 (0) 56 424 992 | Fax +32 (0) 56 435 707  
 BTW BE 0824.326.685 | ING IBAN BE47 3630 7083 3480 | BIC BBRUBEBB

### 3. Product Parameters:

Part No	CCT(K)	CRI	R9	Pow(W/m)	LM/W	LM/M	VDC	IP
13-6527210	2700	>90	>50	10	100	1000	24	66
13-6530210	3000	>90	>50	10	101	1010	24	66
13-6540210	4000	>90	>50	10	105	1050	24	66

### 4. Packing

Included accessories

- 10 Silicone mounting bracket
- 3 Endcaps closed
- 3 Endcaps with holes
- 1 tube with glue

### 5. Precautions

1. The given data are typical value, Due to tolerances of the production process and electrical components, electrical power can be  $\pm 10\%$
2. Less than 14.4W/M(4.39W/feet)no need for additional heat sinking on Alu profile, if more than 14.4W/M(4.39W/feet) must be used the heat sinking.

**LEDSCO BVBA**

Drieslaan 6 | B-8560 Wevelgem (Moorsele) | Tel +32 (0) 56 424 992 | Fax +32 (0) 56 435 707  
BTW BE 0824.326.685 | ING IBAN BE47 3630 7083 3480 | BIC BBRUBEBB