
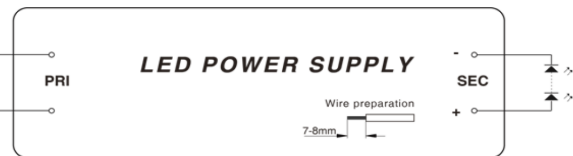
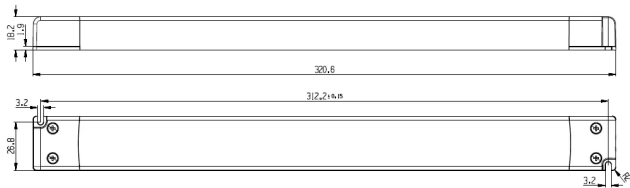


## 8 380 20 24 150 - IP20 LED power supply

### Product Features

- European AC input (220-240VAC)
- Build-in active PFC function
- IP20 suitable for dry environment
- protections: Short circuit / Over voltage / Over temperature
- Adopt plastic case and internal glue potting
- Build-in lightning protection device, it can satisfy DM 1kV
- Comply with the work lighting equipment safety standards.
- 3 years warranty

### 1. Dimension



### 2. Description

This supply is an indoor constant voltage LED power supply, rated input voltage AC 180-264VAC, with maximum conversion efficiency of 94% and fan free design, working temperature range of -20 °C to +45 °C under free air convection, and has ultra-high power factor, ultra-low THD, low standby power consumption, all-round protection function, not only greatly improves the reliability of products, but also ensures the life cycle of products.

This series for LED Lighting design, applied to indoor lighting design. Suitable for almost any indoor location where LED Lighting can be installed in a variety of applications. Comply with the world lighting equipment safety specifications, also ensure the safety of users and lighting system during installation.

**LEDsGO BV**

Drieslaan 6 | B-8560 Wevelgem (Moorsele) | Tel +32 (0) 56 424 992  
BTW BE 0824.326.685 | ING IBAN BE47 3630 7083 3480 | BIC BBRUBEBB

### 3. Model:

Output voltage	Output current	Max. Output power	Output current precision	Power factor (typ.)	Efficiency (typ.)	Model
24V	0-6,25A	150W	~5%	4%	0,95	93%

### 4. Input:

Parameter	Min. Value	Typical Value	Max. Value	Note
Rated input voltage	220VAC		240VAC	Derating curve is shown in figure
input voltage	198VAC		264VAC	
input frequency	47Hz		63Hz	
Max. Input current			1A	230VAC, Full load
Input inrush current			60A	30VAC/50Hz, cold start
Power factor	0,95	0,97		230VAC, Full load
Total harmonic input		4%	5%	230VAC, Full load
Leakage current			0,7mA	230VAC/50Hz, Full load
Stand-by power consumption		0,4W	0,5W	230VAC/50Hz, No load


### 5. Output:

Parameter	Min. Value	Note
Output voltage	24,0VDC	
Rated output current	6,25A	
Output current	0-6,25A	
Rated output power	150W	
Rated output efficiency	93%	230VAC
Output voltage precision	~5%	
Output voltage ripple ( PK-PK )	~3%	Full load (Test under 20M bandwidth)
Output current ripple ( PK-PK )	---	Full load (Test under 20M bandwidth)
Rise time	100ms	230VAC
Startup time	300ms	230VAC
Line regulation	~1%	full Load
Load regulation	~1%	

**LEDGO BV**

Drieslaan 6 | B-8560 Wevelgem (Moorsele) | Tel +32 (0) 56 424 992  
 BTW BE 0824.326.685 | ING IBAN BE47 3630 7083 3480 | BIC BBRUBEBB

## 6. Characteristic curve:

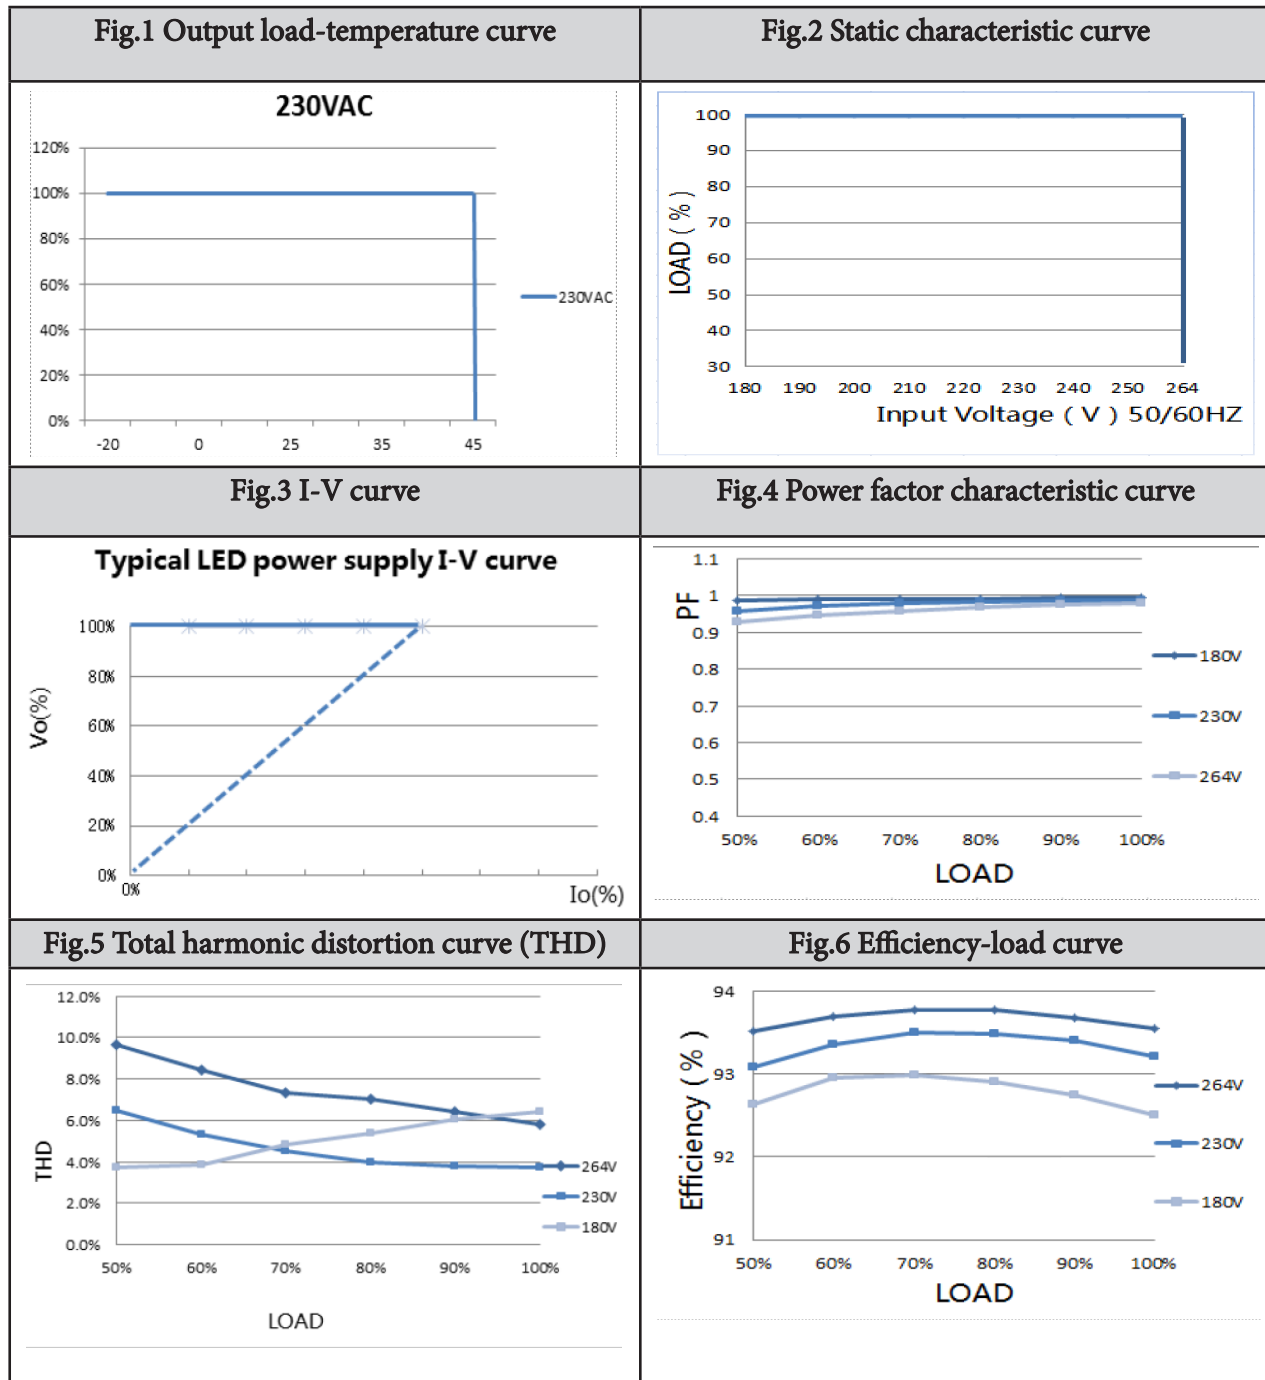

**LEDGO BV**

Drieslaan 6 | B-8560 Wevelgem (Moorsele) | Tel +32 (0) 56 424 992  
 BTW BE 0824.326.685 | ING IBAN BE47 3630 7083 3480 | BIC BBRUBEBB

## 7. Protection:

Parameter		Conditions	Note
Protection	Over load	1.1 ~ 1.6 times rated load	Overloading restores automatically
	Short circuit	Short circuit power $\leq 0.5W$	Hiccup mode, auto-recovery after short circuit removal
	Over voltage	1.5 times of rated output voltage	Turn off the input voltage and recover after restart
	Over temperature	110°C	Turn off the input voltage and restore the temperature to normal value

## 8. Environment Requirement:

Parameter	Min.	Typ.	Max.	Note
Working temp.	-20°C	25°C	+45°C	See Fig.2
Storage temp.	-40°C	25°C	+85°C	
Working humidity	10%RH		90%RH	
Storage humidity	5%RH		95%RH	
IP grade			IP20	
Cooling mode	Natural cooling			

## 9. Safety & EMC standard:

Certificate	Safety standards
UL/CUL	--
TUV	EN 61347-1: 2015 EN 61347-2-13: 2014+A1 EN 62493: 2015
SAA	AS/NZS 61347.2.13
CCC	---
CE	EN 61347-2-13: 2014+A1 EN 61347-1: 2015

**LEDGO BV**

Drieslaan 6 | B-8560 Wevelgem (Moorsele) | Tel +32 (0) 56 424 992  
BTW BE 0824.326.685 | ING IBAN BE47 3630 7083 3480 | BIC BBRUBEBB

Safety test		Qualification	Note
Dielectric Compressive Strength	Input to output	3750VAC/5mA Max/60s	Strengthen insulation, No breakdown, No arc
	Primary to ground	---	Basic insulation, No breakdown, No arc
	secondary to ground	---	Functional insulation, No breakdown, No arc
Insulation resistance	Input to output	≥10M	Test voltage: 500VDC
Grounding Resistance	---	---	25A/1min
Leakage Current		≤0.75mA	264VAC
EMI/EMS Item		Standard/Level	Data
Conduction CE		EN55015	
Radiation RE		EN55015	
Harmonics		EN IEC 61000-3-2	Class C

## 10. Others:

Parameters	Conditions	Note
Lifetime	30,000 hours	230VAC, Full load, Max TC75°C
MTBF	200,000 hours	230VAC, Full load, TA25°C (MIL-HDBK-217F)
TC	90°C	
Warranty	3 years	---
Weight	520g	
Dimensions	320.6mm x 30mm x 18.2mm	L x W x H

**LEDGO BV**

Drieslaan 6 | B-8560 Wevelgem (Moorsele) | Tel +32 (0) 56 424 992  
 BTW BE 0824.326.685 | ING IBAN BE47 3630 7083 3480 | BIC BBRUBEBB