



13-201830 22 40 LEDflex softdim 1800/3000K 224 leds/m 24VDC


DIM TO WARM



0/1-10V Dimmer



0/1-10V Dimmer

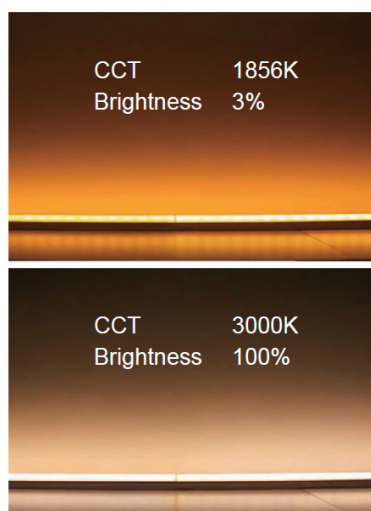


Product Features

Dim to warm, CCT gets warmer when brightness going down.

Easy application without control system, it can be used directly connected with silicon controlled, 0/1-10V, PWM constant voltage dimmable driver. Also compatible with DC24V PWM dimmer.



Structure & Parameter

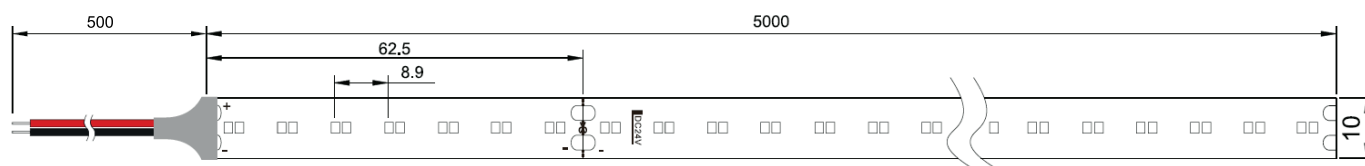

Optical Parameter

Model No	SK-ST9Q224V24-Ca
Input voltage	DC 24V
Power/m	18w
Max current / LED	20mA
CRI (Ra)	>90
Color temperature	1800 - 3000K
Lumen / m	1460LM

Basic Parameter

LED Q' ty/m	224/m
SMD Type	2216
Working hour	30000h
Warranty	3years
Working temperture	-20°C ~ +45 °C
Minim cuttable length	62.5mm
PCB Width	10


LEDsGO BVBA

Drieslaan 6 | B-8560 Wevelgem (Moorsele) | Tel +32 (0) 56 424 992 | Fax +32 (0) 56 435 707
BTW BE 0824.326.685 | ING IBAN BE47 3630 7083 3480 | BIC BBRUBEBB


13-201830 22 40 LEDflex softdim 1800/3000K 224 leds/m 24VDC**DIM TO WARM**

The following curve which is based on 0-10V dimmable driver is for your reference only. The curve will be a little different with other dimmable drivers testing.

CCT Curve

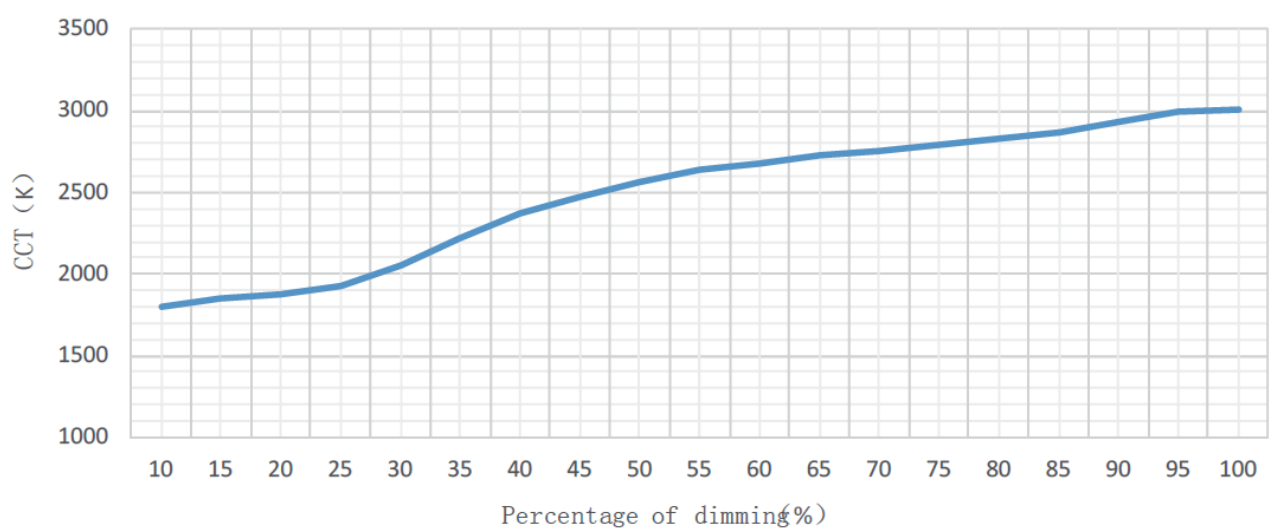


Luminance Curve

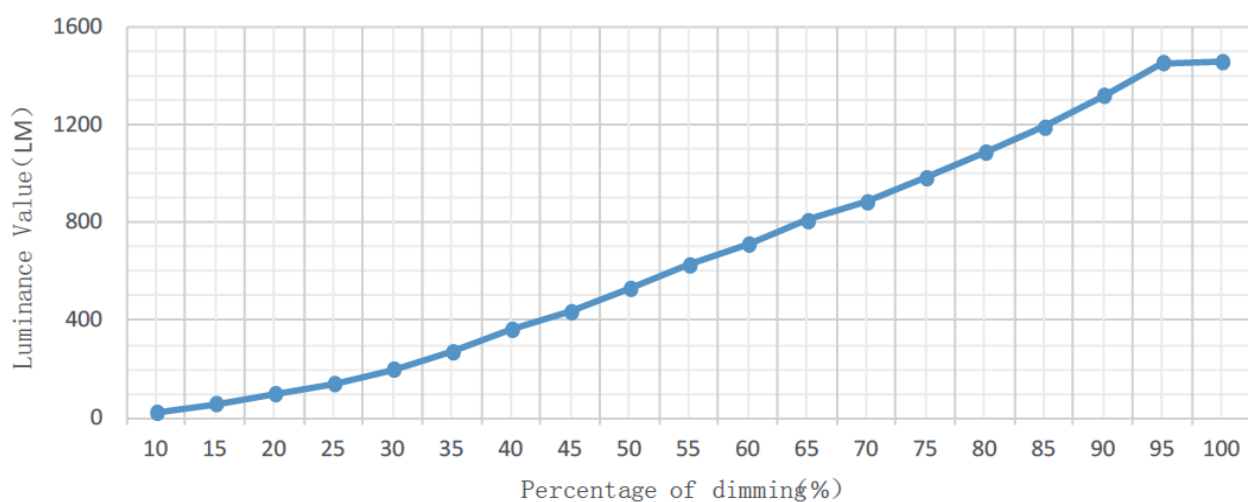**LEDsGO BVBA**


Drieslaan 6 | B-8560 Wevelgem (Moorsele) | Tel +32 (0) 56 424 992 | Fax +32 (0) 56 435 707
BTW BE 0824.326.685 | ING IBAN BE47 3630 7083 3480 | BIC BBRUBEBB

Wiring Diagram

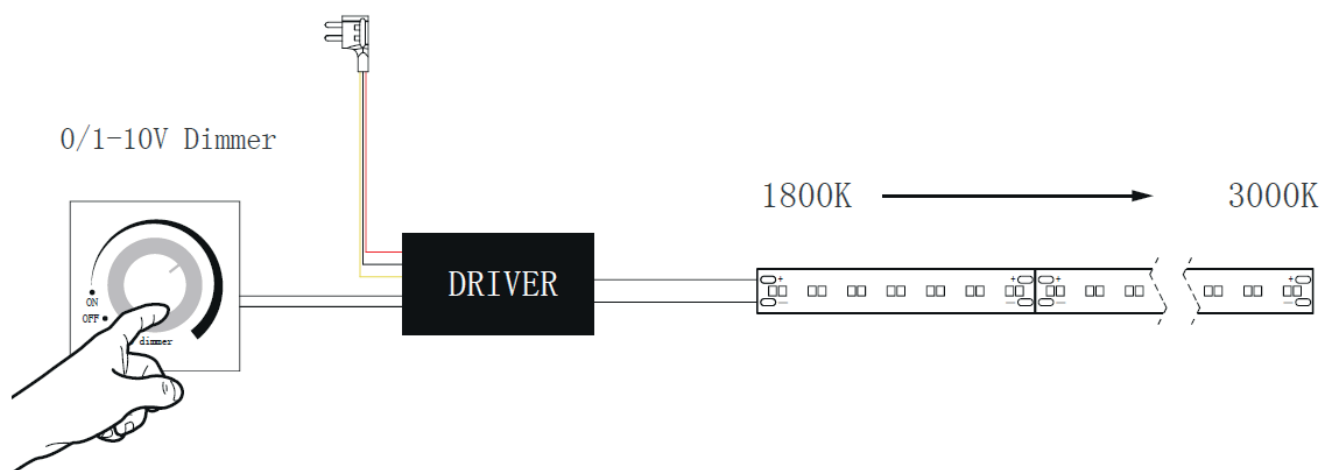

Cautions


When install the led strip, please note the installation technique. The led strip can be bent, but not distorted, as shown below.

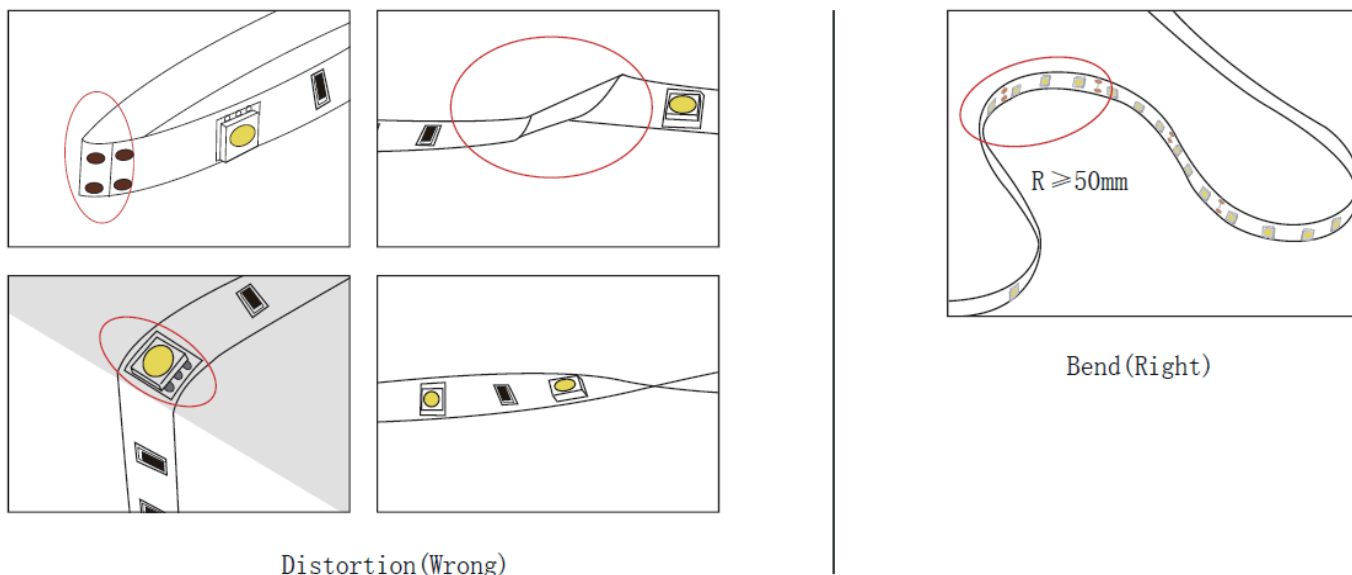

LED strips are low voltage products, you must use the power supply (transformer). Please don't connect the led strip directly to the AC 110v or AC 220v, otherwise it will burn out the LED strips.

Clean up the installation surface, it will ensure the reliability of the adhesive. The electrical connection process must be operated by a professional person.

Package

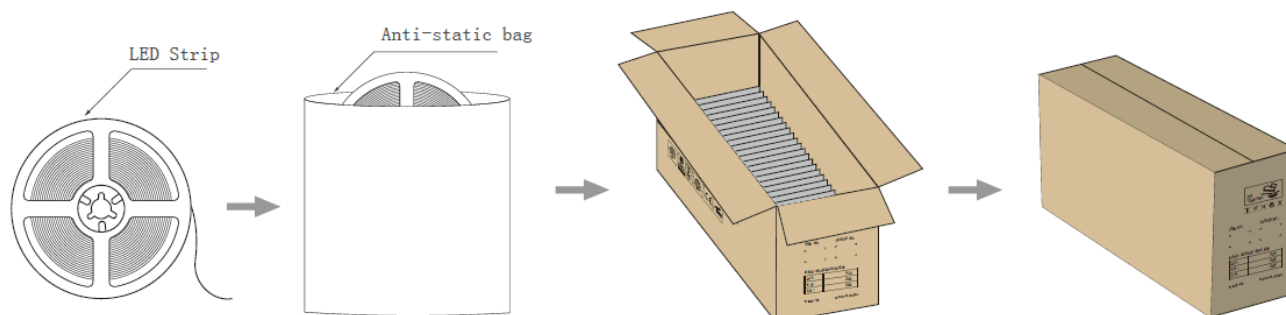

LEDsGO BVBA

Drieslaan 6 | B-8560 Wevelgem (Moorsele) | Tel +32 (0) 56 424 992 | Fax +32 (0) 56 435 707
BTW BE 0824.326.685 | ING IBAN BE47 3630 7083 3480 | BIC BBRUBEBB